



*Making
Power
Perform*

PRODUCT CATALOGUE



ISO 9001:2015 CERTIFIED

www.kedbrooke.com

Certificate Nr. XXXXXXXX
Issue Date. XXXXXXXX



Certificate of Registration

STAREGISTER certifies that, after successful auditing, the
Management System of

Kedbrooke Middle East Fzco

located at
P.O Box 42831, Hamriyah Free Zone,
Sharjah-United Arab Emirates

was found to comply to the requirements established in the standard :

ISO 9001 : 2015

"Quality Management Systems-Requirements"

with the Scope:
Trading of Electrical Products
IAF Sector Code : 29

Initial Certification : July 06, 2020
Expiry Date : July 06, 2023
1st surveillance :
2nd surveillance :

Certification Manager



www.staregister.org

150 N. Michigan Ave
Suite 2800
Chicago, IL 60601

F1001-7

Use of this certificate is subject to terms of certification Agreement.
This certificate remains the property of STAREGISTER International Inc.



Established in 2005, Kedbrooke Industries Ltd is an International leading manufacturer and distributor of quality electrical products under the brand name "KEDBROOKE".

Operating out of more than 15 contractual manufacturing facilities. KIL exports its products to Middle East, Africa, Europe and South East Asia. KIL is dedicated to ensure supply of reliable, efficient and safe products at reasonable prices for the global market. The engineers at Kedbrooke have made it possible for us to offer the best solutions at prices that beat our competitors by a mile. Kedbrooke keeps itself updated with the latest technologies to provide you with products that none can match.

INDEX

.....

Fans - Commercial & Industrial

05-16

Lamps & Lightings

13-22

G.I. Conduits & Accessories

23-26

Cable & Cable Accessories

27-34

Wiring Accessories

35-40

Enclosures & Junction Boxes

41-42

Water Heaters

43-44

Product Range

45



FANS - COMMERCIAL & INDUSTRIAL

CEILING FAN

WALL FAN

STAND FAN

ORBIT FAN

WINDOW MOUNTED EXHAUST FAN

AUTO SHUTTER FAN

ELECTRIC SHUTTER FAN

CEILING DUCT EXHAUST FAN

INDUSTRIAL PEDESTAL FAN

INDUSTRIAL WALL FAN

INDUSTRIAL MIST FAN

INDUSTRIAL EXHAUST FAN

PORTABLE BLOWER FAN



CEILING FAN - KBQS 56

- ◆ Perfect design with nice appearance
- ◆ Powerful and durable motor with double ball bearings, producing strong air flow
- ◆ Controlled normal temperature during operation
- ◆ 5 speed wall mounted regulator with patent

SPECIFICATIONS:

Voltage / Frequency	220-240V/50Hz
Motor Power	80W
Motor external diameter	238mm
Cover of motor	Plastic cover
Motor Weight.	3.2KGS with copper windings
Motor Speed	≥290 RPM
Bearings	Double bearings, 6202#
Down Rod	300mm
Motor Temperature	≤75 K
Color	Body - White, Ring - Silver or Gold
Rotor Diameter	∅ 152MM
Rotor Thickness	16.9mm



Stator Diameter	127.5 mm
Blade Thickness	Hot rod steel 0.8mm
Blade length	620 mm
Blade angle	5°
Canopy	PP
Regulator	ABS with 5 speed

CEILING FAN - KBDS 56-10

- ◆ Perfect design with nice appearance
- ◆ Powerful and durable motor with double ball bearings, producing strong airflow
- ◆ Keeping normal temperature during operation
- ◆ 5-speed wall-mounted regulator with patent
- ◆ More colors option also

Voltage & Frequency	220-240V, 50HZ
Motor Power	75 W
Motor external diameter	196 mm
Cover of motor	hot-rolled steel
Motor Weight.	2.5 Kgs with copper windings
Motor Speed	≥ 290 RPM
Bearings	Double Bearings, 6202#
Down Rod	200mm
Motor Temperature	≤75 K
Rotor Diameter	152 mm



Rotor Thickness	14.95mm
Stator Diameter	127.5 mm
Blade material	Hot-rolled steel 0.78 mm
Blade length	625 mm
Blade angle	5°
Canopy	PP
Regulator	PP with 5 speed

WALL FAN, STAND FAN & ORBIT FAN



WALL FAN - 16"

- ◆ Double ball bearing motor for durable operation
- ◆ 5 star highest energy efficient fan
- ◆ 3 speed rotating control with rope.
- ◆ 3 AS Blades



STAND FAN

- ◆ 5 star highest energy efficient fan
- ◆ 5-pp blades for powerful cooling
- ◆ 120-minute timer switch
- ◆ 3 speed control
- ◆ Adjustable height (118cm – 158cm)



ORBIT FAN

- ◆ Metal blade for powerful cooling
- ◆ 5 star highest energy efficient fan
- ◆ 360 Degree oscillation
- ◆ 4 speed control

Ventilating Fan - ROUND

- ◆ First class plastic PP material
- ◆ Silicon steel motor with built-in thermo-cut-off protection
- ◆ Advanced blade design for high air volume and low noise level
- ◆ Easy installation for glass and wall

SPECIFICATIONS:

Model	Rated Voltage	Rated Frequency	Rated Power	Air Delivery	Noise
	[V]	[Hz]	[W]	[M3/h]	[dB]
KBEF15G(6")	220-240	50/60	15	260	37
KBEF20G(8")	220-240	50/60	20	320	40



Ventilating Fan - SQUARE

- ◆ First class plastic PP material
- ◆ Silicon steel motor with built-in thermo-cut-off protection
- ◆ Advanced blade design for high air volume and low noise level
- ◆ Easy installation for glass and wall

SPECIFICATIONS:

Model	Rated Voltage	Rated Frequency	Rated Power	Air Delivery	Noise
	[V]	[Hz]	[W]	[M3/h]	[dB]
KBE15A(6")	220-240	50/60	23	258	39
KBE20A(8")	220-240	50/60	28	480	44
KBE25A(10")	220-240	50/60	38	720	45
KBE30A(12")	220-240	50/60	48	1100	48



AUTO SHUTTER FAN

- ◆ First class ABS material
- ◆ Silicon steel motor with built-in thermo-cut-off protection
- ◆ Big air flow and quite
- ◆ Easy installation for glass and wall
- ◆ Automatic thermo-actuator for shutter open/close

SPECIFICATIONS:

Model	Voltage	Input (W)	Air-Flow (m³/h)	Noise (dB)	Size (mm)
KBAF15	220-240	22	220	37	150
KBAF23	220-240	40	520	40	230



VENTILATING FAN

GLASS & CEILING FAN

- ◆ First class ABS material
- ◆ Silicon steel motor with built-in thermo-cut-off protection
- ◆ Advanced blade design for high air volume and low noise level
- ◆ Easy installation for glass and ceiling.

SPECIFICATIONS:

Model	Size (Inch)	Rated Voltage	Rated Frequency	Rated Power	Air Delivery	Noise
		[V]	[Hz]	[W]	[M3/h]	[dB]
KBE10C	4"	220-240	50/60	13	58	40
KBE15C	6"	220-240	50/60	22	162	45



GLASS & CEILING FAN

- ◆ First class ABS material
- ◆ Silicon steel motor with built-in thermo-cut-off protection
- ◆ Advanced blade design for high air volume and low noise level
- ◆ Easy installation for glass and ceiling.

SPECIFICATIONS:

Model	Size (Inch)	Rated Voltage	Rated Frequency	Rated Power	Air Delivery	Noise
		[V]	[Hz]	[W]	[M3/h]	[dB]
KBAPT20A	8"	220-240	50/60	23	258	47
KBAPT25A	10"	220-240	50/60	28	432	49



ELECTRIC SHUTTER FAN

- ◆ First class ABS & PP material
- ◆ Silicon steel motor with built-in thermo-cut-off protection
- ◆ Big air flow and quite
- ◆ Easy installation for glass and wall

SPECIFICATIONS:

Model	Size(Inch)	Watts	Voltage	Air Delivery	Speed	Current
KBE15E16"	6"	23W	220-240V	240m3/h	1300r/min	0.13A
KBE20E18"	8"	28W	50/60Hz - T45	360m3/h	1250r/min	0.15A




PEDESTAL & WALL FAN - INDUSTRIAL

PEDESTAL / STAND FAN - HEAVY DUTY

- ◆ Large air volume and low noise, effectively motor
- ◆ Three speeds, chroming and densely guard
- ◆ Optimized alumized aluminum-iron blade structure, two or three blades
- ◆ Suitable for cooling-down temperature in mineral factories, workshop, warehouse and hall etc.

Model	Size	Sweep	Power	Voltage	Frequency	Speed	dB(A)	Airflow M ³ /min
KBPF24HD	24"	24" 60CM	230W	220-240V	50Hz	1350 RPM	76	185 M ³ /min
KBPF26HD	26"	26" 65CM	230W	220-240V	50Hz	1350 RPM	80	205 M ³ /min
KBPF30HD	30"	30" 75CM	280W	220-240V	50Hz	1350 RPM	86	290 M ³ /min

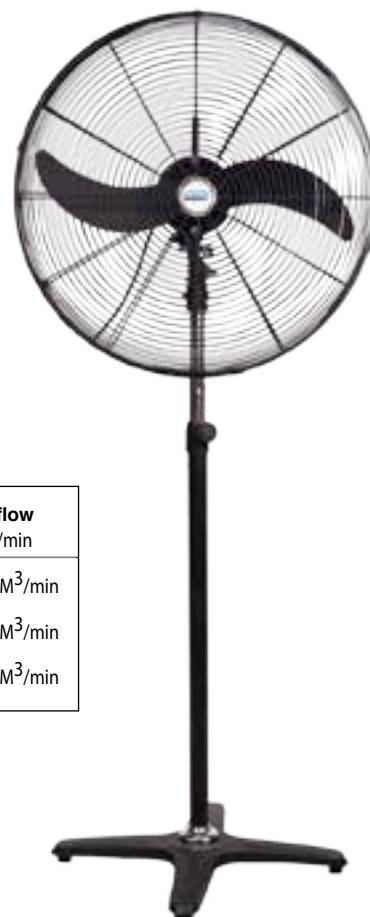

WALL MOUNT - HEAVY DUTY

- ◆ Full cooling temperature system, motor with a long service life
- ◆ Novel outlook, large air volume, low temperature rise and noise
- ◆ Three speeds, powder, chroming and densely guard
- ◆ Optimized aluminum-iron blade structure, two or three blades
- ◆ Suitable for cooling-down temperature in mineral factories, workshop, warehouse and hall etc.

Model No.	Size	Sweep	Power	Voltage	Frequency	Speed	Current	Airflow M ³ /min
KBWF20HD	20"	20" 50 CM	130 W	220 - 240V	50Hz	1350 RPM	0.7 A	170 M ³ /min
KBWF24HD	24"	24" 60 CM	230 W	220 - 240V	50Hz	1350 RPM	0.7 A	185 M ³ /min



MIST FAN - INDUSTRIAL

CENTRIFUGAL / MIST FAN

Voltage : 220V-240V
Frequency : 50Hz
Size : 26"
Power : 260W
RPM : 1300 ~ 1400
Tank : Plastic tank with 48L
Max Mist volume : 5L/H
100% Copper Motor with 3 speed

Suitable for Outdoor patios, sports activities, warehouses, garages, zoos, cookouts, pools, concerts, horse stables, outdoor wedding, greenhouses, receptions, amusement parks, special events, construction sites or any location that needs relief from the summer heat.

Model	Dia mm	Use Area (M2)	Temperature Drop(0C)	Air Volume (M3/min)	Noise	Measurement (H)	Oscillation Angle
KBFL650F-1	650	35	4-6	205	68	2200mm	0-900



WALL MIST FAN

Model: KBFLW-650F-1
Voltage: 220-240V
Frequency: 50Hz
Size: 26"
Power: 260W
Tank : Plastic tank with 14L
RPM: 1300 ~ 1400
Air Volume : 138

Suitable for warehouses, garages, receptions, special events, construction sites or any location that needs relief from the summer heat.



VENTILATING FAN & BLOWER FAN - INDUSTRIAL

VENTILATING FAN - INDUSTRIAL

- ◆ Epoxy powder coating to make it corrosion resistant against chemically charged atmosphere and saturated humid conditions
- ◆ Motors with class 'B' insulation to ensure operation at a high temperature
- ◆ Low noise rolling bearing, and it has a long service life
- ◆ High-quality, low weight, novel outlook, easy for install
- ◆ Suitable for ventilation in factory, residence, office, hotel and entertainment places etc



MODEL	FAN DIA (MM/INCH)	SPEED (RPM)	POWER WATTS	PHASE	CURRENT (AMP)	FREE AIR FLOW M3/HR	FT3/MIN
FA25B	250 (10")	1200	45	Single	0.21A	1100	640
FA30B	300(12")	1000	75	Single	0.34A	1800	1000
FA35B	350(14")	1200	135	Single	0.65A	2600	1500
FA40B	400(16")	950	160	Single	0.75A	4100	2400
FA45B	450(18")	900	250	Single	1.15A	5400	3100
FA50B	500(20")	850	350	Single	1.6A	6100	3500
FA60A	600(24")	950	200	Single	0.77A	8100	4700

PORTABLE BLOWER - INDUSTRIAL

- ◆ Novel outlook, excellent craftwork, with U supporter
- ◆ Supporter and handle flexible using, movable operation with flexible duct
- ◆ Connecting a flexible soft duct, high pressure under long distance
- ◆ Suitable for underground, telecommunication, repairing tunnel project, warehouse etc.
- ◆ Available in 110V also.



Model	Size	Phase	Power V / W / Hz	Speed / Noise r.p.m / db (A)	Air-Flow (CBM/h)
KB-SHT20	200mm	1	220 / 230 / 50-60	2800-3300 / 63	25m ³ /min
KB-SHT25	250mm	1	220 / 320 / 50-60	2800-3300 / 68	43m ³ /min
KB-SHT30	300mm	1	220 / 520 / 50-60	2800-3300 / 71	65m ³ /min
KB-SHT35	350mm	1	220 / 750 / 50-60	2800-3300 / 76	82m ³ /min
KB-SHT40	400mm	1	220 / 1100 / 50	2800 / 80	96m ³ /min
KB-SHT45	450mm	1	220 / 1500 / 50	2800 / 83	162m ³ /min



LAMPS & LIGHTING

LED SPOT LIGHT

LED BULB

BATTEN FITTINGS WITH LED GLASS TUBE

LED - WEATHERPROOF FITTINGS

LED PANEL LIGHT

LED DOWN LIGHT

LED CEILING LIGHT

LED STAND LIGHT

LED PANEL LIGHT

INSECT KILLER

FLOOD LIGHT

HIGH BAY

LED SPOTLIGHT

Adjustable LED Spot light made of high quality plastic with aluminum reflector and PC cover, IP20.

Voltage : 170-240V
 Life Span : 20,000 Hrs
 Lumen : 90Lm/W
 Adjustable : up to 45°
 No flicker, Available in 7W and 10W,
 Colour Temp.: 3000K, 4000K, 6500K



Model	Wattage	Lumen	Beam Angle	Colour Temp.	Cut Out	Dimension
KB-SPL7WW	7W	630	38°	3000K	70mm	ø90mm x H45mm
KB-SPL7DL	7W	630	38°	6500K	70mm	ø90mm x H45mm
KB-SPL10WW	10W	900	38°	3000K	100mm	ø120mm x H45mm
KB-SPL10DL	10W	900	38°	6500K	100mm	ø120mm x H45mm

LED SPOTLIGHT - MR16 - GU 5.3 & GU 10

Voltage : 220-240V
 CRI : ≥ 80
 Beam Angle : 38°
 Life Span : 15,000 Hrs
 Lumen : 90Lm/W



Model	Wattage	Lumen Colour	Temp.
KB-GU5.3-7WW	7W	630	3000K
KB-GU5.3-7DL	7W	630	6500K
KB-GU10-7WW	7W	630	3000K
KB-GU10-7DL	7W	630	6500K



LED FILAMENT LAMP & CANDLE LAMP

LED Filament Antique Lamp -ST64

Perfect alternatives to incandescent bulb.

This filament bulb is built with an attractive vintage design, preserve the style of traditional Edison light bulbs.

Suitable for application of art lamps.

Voltage : 170-240V 50/60Hz
Colour Temp. : 3000K/4000K/6500K
Beam Angle : 360°
Colour : Clear
Lamp Base : E27, E14
Lumen : 100 Lm/W
Life Span : 25,000 Hrs



Model	Wattage	Lumen	Colour Temp.	Base	PF	CRI
KB-ST64LED-8WW	8W	800	3000K	E27	0.9	100
KB-CLE14-4WW	4W	400	3000K	E14	0.9	100
KB-CLE14-4DL	4W	400	6500K	E14	0.9	100

LED BULB - E27

with aluminum shell (Non Dimmable)

Voltage : 170-240V
Power Factor : >0.5
CRI : ≥ 80
Beam Angle : 240°
Operating Temp. : -20°C to 50°C
Life Span : 15,000 Hrs



Model	Base	Wattage	Lumen	Colour Temp.
KB-LB-E27-9W	A60-E27	9W	810	6500K
KB-LB-E27-15W	A70-E27	15W	1350	6500K
KB-TB9D	E27	9W	900	6500K
KB-TB13D	E27	13W	1300	6500K

BATTEN FITTINGS WITH LED GLASS TUBE

BATTEN WITH LED GLASS TUBE - MAX

LED batten made of sheet steel body

Voltage : 220-240V, IP Rating : IP20

Life Span : 15,000 Hrs



Model	Wattage	Lumen	Colour Temp.	PF	CRI	Length
KBML-BF113	1x13W	1040lm	6500K	0.9	80	0.6m
KBML-BF125	1x25W	2250lm	6500K	0.9	80	1.2m

LED GLASS TUBE

Watts : 13W & 25W

Voltage : 220-240V

Body : PC

Life Span : 15,000 Hrs



BATTEN WITH LED GLASS TUBE - LUMINO

LED batten made of sheet steel body

Voltage : 220-240V

IP Rating : IP20

Life Span : 25,000 Hrs



Model	Wattage	Lumen	Colour Temp.	PF	CRI	Length
KB-LBF-12	1x12W	900	6500K	0.9	80	0.6m
KB-LBF-22	1x22W	2100	6500K	0.9	80	1.2m
KB-LBF-212	2x12W	1800	6500K	0.9	80	0.6m
KB-LBF-222	2x22W	4200	6500K	0.9	80	1.2m

LED MIRROR LIGHT WITH SWITCH

Voltage : 220-240V

IP Rating : IP20

Life Span : 15,000 Hrs



Model	Wattage	Lumen	Colour Temp.	PF	CRI	Length
KB-ML112S	1x12W	900	6500K	0.9	80	0.6m

LED - WEATHERPROOF FITTINGS - IP65

LED WEATHERPROOF FITTINGS WITH ABS + PC COVER + METAL CLIPS

Voltage : 220-240V
Life Span : 15,000 Hrs



WEATHERPROOF - ECO WITH METAL CLIPS

Model	Wattage	Lumen	Colour Temp.	PF	CRI	Length
KBLWP-12	1x13W	900	6500K	0.9	80	0.6m
KBLWP-14	1x25W	2100	6500K	0.9	80	1.2m
KBLWP-22	2x13W	1800	6500K	0.9	80	0.6m
KBLWP-24	2x25W	4200	6500K	0.9	80	1.2m

WEATHERPROOF WITH METAL CLIPS

Voltage : 220-240V
Life Span : 25,000 Hrs



Model	Wattage	Lumen	Colour Temp.	PF	CRI	Length
KB-WP12LED	1x13W	900	6500K	0.9	80	0.6m
KB-WP14LED	1x25W	2100	6500K	0.9	80	1.2m
KB-WP22LED	2x13W	1800	6500K	0.9	80	0.6m
KB-WP24LED	2x25W	4200	6500K	0.9	80	1.2m



LED PANEL LIGHT / DOWN LIGHT

RECESSED & SURFACE

LED Slim panel light made of die-cast aluminum body with PC diffuser.

Size	: 6", 8" & 10"
Watts	: 12W, 18W & 24W
Voltage	: 85V-265V 50Hz
CRI	: ≥ 70
Lumen	: 80 lm/W
IP Rating	: IP20
LED Driver	: Isolated
Lifetime	: 30,000 Hrs



LED DOWNLIGHT - COB

LED COB downlight made of die-cast aluminum body with glass diffuser. IP 20.

Voltage	: 170-240V
Life Span	: 25,000 Hrs
Lumen	: 90Lm/W
Power Factor	: >0.9



Model No.	Wattage	Lumen	Beam Angle	CRI	Colour Temp.	Dimension
KB-LCD20DL	20W	1800	38°	≥ 70	6500K	ø170mm x H60mm
KB-LCD30WW	30W	2700	38°	≥ 70	3000K	ø220mm x H60mm
KB-LCD30NW	30W	2700	38°	≥ 70	4000K	ø220mm x H60mm
KB-LCD30DL	30W	2700	38°	≥ 70	6500K	ø220mm x H60mm



LED CEILING LIGHT & LED STAND LIGHT

LED CEILING LIGHT

Made of non yellowing polycarbonate body,

Life Span : 15,000 Hrs

IP Rating: IP20



Model No.	Wattage	Lumen	Beam Angle	CRI	Colour Temp.
KBLCL18W	18W	1600 Lm	120°	>76	6500
KBLCL24W	24W	2000Lm	120°	>76	6500

LED STAND LIGHT

Aluminum fitting with anodized aluminium reflector. LED Light source shield made of tempered glass, resistant to shock and temperature changes. Fitting equipped with Tripod. High IP rating (IP 65), protects the light source against dust and water penetration.



Voltage: 240V/50Hz, Material: Die Casting Aluminum, IP Rating: IP65

Model No.	Wattage	Lumen	Colour Temp.	Body Colour
KBFLIC19003	1x50W	4250 Lm	6500K	Yellow
KBFLIC19003	2x50W	8500 Lm	6500K	Yellow

LED PANEL LIGHT

LED PANEL LIGHT - 60x60

Ultra thin design, 70% energy saving

Luminous efficiency up to 90lm/W UGR<19

Made of high quality aluminum frame.

with PMMA diffuser (No yellowing), No flicker.

Life Span : 30,000 HRS

Size : 595 x 595mm

IP Rating : IP20



Model No.	Wattage	Lumen	Beam Angle	CRI	Colour Temp.
KB-SL-M45-40W WW	40W	3600 Lm	120°	>80	3000K
KB-SL-M45-40W NW	40W	3600 Lm	120°	>80	4000K
KB-SL-M45-40W DL	40W	3600 Lm	120°	>80	6500K



LED PANEL LIGHT & INSECT KILLER

LED PANEL LIGHT - 60x60

Ultra thin design, Made of high quality aluminum frame with PC diffuser.

Life Span : 15,000 HRS
Size : 595 x 595 mm
IP Rating : IP20



Model No.	Wattage	Lumen	Beam Angle	CRI	Colour Temp.
KB-SL-M45-36W DL	36W	2520 Lm	120°	>80	6500K
KB-SL-M45-48W DL	48W	3360 Lm	120°	>80	6500K
KB-SL-M45-60W DL	60W	4200 Lm	120°	>80	6500K

INSECT KILLER

Available Sizes: 2x6W, 2x8W, 2x10W, 2x15W, 2x20W



Patented design

Best quality UV-A tube to ensure 100% Insect killing rate

International safety approved inner components for high quality assurance

Open-ended, but safely protective outer mesh for maximum attraction rate

With collection tray for easy cleaning

Made for hanging or free-standing

No chemical, eco-friendly

Ideal for using at kitchen, restaurant

FLOOD LIGHT & HIGH BAY

LED FLOOD LIGHT



High efficient LED flood light suitable for outdoor and indoor area lighting. Body made of die-cast aluminum, black powder coated with toughened glass. With high quality SMD chips. Save up 80% energy have better lighting characteristics than traditional metal halide.

Features:

Slim & Compact design, Instant start, No flickering

High strength and impact resistance

Life span: 30,000 hrs

IP 65

Working temp: -40°C to 60°C

Model No.	Watts Efficiency	Voltage	Luminous	Color Temp	CRI	IP Rating	Power factor	Beam Angle (Hrs)	Lifetime Materials	Housing
KB-TG-D-30W	30W	85-265V	≥100LM/W	6500K	≥70	IP65	0.9	120°	30,000	Aluminum
KB-TG-D-50W	50W	85-265V	≥100LM/W	6500K	≥70	IP65	0.9	120°	30,000	Aluminum
KB-TG-D-100W	100W	85-265V	≥100LM/W	6500K	≥70	IP65	0.9	120°	30,000	Aluminum
KB-TG-D-150W	150W	85-265V	≥100LM/W	6500K	≥70	IP65	0.9	120°	30,000	Aluminum
KB-TG-D-200W	200W	85-265V	≥100LM/W	6500K	≥70	IP65	0.9	120°	30,000	Aluminum

LED HIGH BAY



Attractive design compact, Black powder coated, Heavy duty die-cast aluminum housing with cover made of polycarbonate stablished against UV lights. It has been treated to eliminate glare without affecting performance.

Features:

1-10V Dimmable

Easy installaion for suspended mounting Extremely high system efficiency, up to 140lm/w Available wide flood beam angles.

Long life time up to 50,000 Hrs

Protection level is IP65

Consumes 50% less energy then traditional metal halide Highbay.

Compact design is great for installations with limited space.

G.I.CONDUIT & ACCESSORIES

G.I CONDUIT - CLASS 4

G.I CONDUIT - CLASS 3

GI BOXES

GI FLEXIBLE CONDUITS - PVC COATED



G.I. CONDUIT CLASS 4 & CLASS 3


G I CONDUIT - CLASS 4

Hot Dip Galvanised Steel Conduits complying to BS 4568 Part 1 :1993.

Hot dip galvanised (Heavy Protection), both inside and outside.

Both ends threaded with one coupler and protected with plastic cap at the other end.

Standard Length is 3.75 meters (10pcs / bundle).

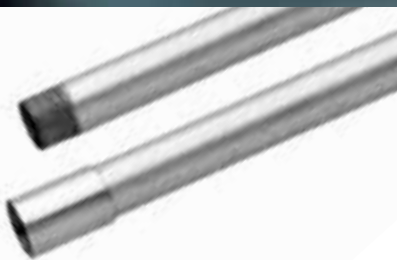

PART No.	Size (mm)	Outside Diameter		Wall Thickness (mm)	Length (meters)	Length of Thread		Primary Bundle (pcs)
		Min	Max			Min	Max	
KBC420	20	18.9mm	19.05mm	1.6±0.15	3.75	11.5mm	13.5mm	10
KBC425	25	25.25mm	25.4mm	1.6±0.15	3.75	13.0mm	15.0mm	10
KBC432	32	31.5mm	31.8mm	1.6±0.15	3.75	16.0mm	18.0mm	10

Also available in 40 & 50mm inside & outside galvanised class 4 (BS31)

G I CONDUIT - CLASS 3

Pre Galvanised Steel Conduits complying to BS 4568 Part 1 :1993.

Pre Galvanised (Heavy Protection), both inside and outside.


Both ends threaded with one coupler and protected with plastic cap at the other end.

Standard Length is 3.75 meters (10pcs / bundle).




PART No.	Size (mm)	Outside Diameter		Wall Thickness (mm)	Length (meters)	Length of Thread		Primary Bundle (pcs)
		Min	Max			Min	Max	
KBC320	20	19.7mm	20.0mm	1.35±0.15	3.75	13.0mm	15.0mm	10
KBC325	25	24.6mm	25.0mm	1.35±0.15	3.75	16.0mm	18.0mm	10
KBC332	32	31.6mm	32.0mm	1.35±0.15	3.75	18.0mm	20.0mm	10

CONDUIT FITTINGS & ACCESSORIES




Branch Two Way (U) No. KB 195

Size: 20mm 25mm
Pack Qty: 10 10




Channel Inspection Tee No. KB 133

Material: Malleable Iron,
Finishes: Black Enamel, Galvanised
Size: 20mm 25mm 32mm




Twin Through Way (H) No. KB 197

Size: 20mm 25mm
Pack Qty: 10 10




Spacer Bar Saddle No. KB 431

Material: Steel
Finishes: Black Enamel, Galvanised
Size: 20mm 25mm 32mm




Malleable Iron Medium No. KB 272

Material: Malleable Iron. Finishes: Black Enamel, Galvanised. With tapped hole in base for earthing screw. 1,2,3,4 Holes.
Minimum: 31mm Deep X 63.5mm Inter.Dia.




Terminal (1 way) No. KB 181

Size: 20mm 25mm
Pack Qty: 10 10




GI Coupler No. KB 101

Material: Steel
Finishes: Black Enamel, Galvanised
Size: 20mm 25mm 32mm
Size: 1½" 2"




Through (2 way) No. KB 182

Size: 20mm 25mm
Pack Qty: 10 10




Internal Thread Normal Bends No. KB 141

Material: Steel
Finishes: Black Enamel, Galvanised
Size: 20mm 25mm 32mm




Angle (A way) No. KB 183

Size: 20mm 25mm
Pack Qty: 10 10




Flanged Coupling No. KB 110/KB111

Material: Malleable Iron
Complete with washer and brass bush
Finishes: Black Enamel, Galvanised
P110 (Lead washer)
P111 (Neprence washer)
Size: 20mm 25mm 32mm



Tee (3 way) No. KB 184

Size: 20mm 25mm
Pack Qty: 10 10



Intersection (4 way) No. KB 185


Size: 20mm 25mm
Pack Qty: 10 10



G.I FLEXIBLE CONDUIT & G.I JUNCTION BOX

G.I FLEXIBLE CONDUIT WITH PVC COATED

Kedbrooke GI Flexible Conduit with PVC coating is intended to protect cables in applications where there is repeated flexing, vibration and bending. When installing wiring systems, adherence to the current wiring regulations is strongly advised.

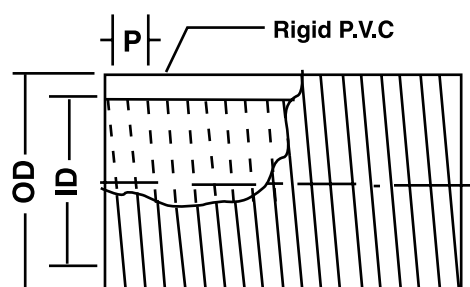

CODE No.	Outer Dia	Inner Dia	Thickness Of Steel Strip (Width*thickness)
KFC-20	20MM	16.5MM	8.6*0.22MM
KFC-25	25MM	21.0MM	9.5*0.22MM
KFC-32	32MM	27.5MM	12.7*0.25MM
KFC-40	43MM	38.0MM	12.7*0.28MM
KFC-50	52MM	46.0MM	17*0.35MM

G.I JUNCTION BOX



MODEL	SIZE	THICKNESS	DEPTH	KNOCK OUT HOLE SIZE	EARTHING
KGIB3X3	3 X 3	0.8MM	35MM	20MM & 25MM	BRASS TERMINAL
KGIB3X3BS	3 X 3	1.1MM	35MM	20MM & 25MM	BRASS TERMINAL
KGIB3X6	3 X 6	0.8MM	35MM	20MM & 25MM	BRASS TERMINAL
KGIB3X6BS	3 X 6	1.1MM	35MM	20MM & 25MM	BRASS TERMINAL

All Kedbrooke GI Junction boxes with adjustable lug.

CABLE & CABLE ACCESSORIES

RUBBER CABLE

CAT 6 CABLE

FLEXIBLE CABLE


CONTROL CABLE

EARTH ROD

CABLE PULLER

TERMINALS

BRASS GLANDS

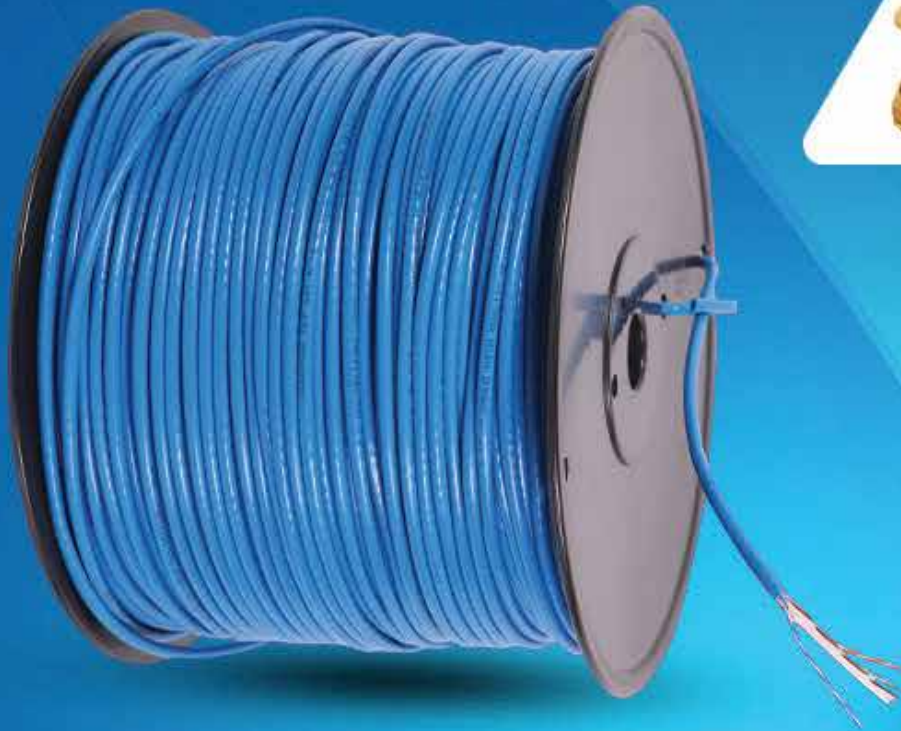

RUBBER CABLE - H07RN-F

LOW VOLTAGE 450/750 V

Reliability and Flexibility.

Based on : EN-50525-2-21

DESIGN

Conductor

Electrolytic copper, class 5 or 6 (flexible), based on EN 60228

Insulation

Thermosetting rubber (type E34).

The standard identification is the following:

- 1X..... Natural
- 2X..... Brown Blue
- 3G..... Brown Blue Yellow/green
- 4G..... Brown Black Grey Yellow/green
- 5G..... Brown Black Grey Blue Yellow/green
- 6G or more --- Black numbered Yellow/Green

Outer sheath

Thermosetting rubber (type EM2). Black colour.

APPLICATIONS

H07RN-F is a rubber flexible power cable specifically designed to operate in tough weather conditions and under high mechanical and thermal stresses. The hard-wearing H07RN-F cable is made up of class 5 flexible plain copper conductors, EPR (Ethylene Propylene Rubber) insulation and a black CPE sheath. With its oil, grease and water resistant sheath, H07RN-F cable is suitable for use in a whole range of different applications, including handling equipment, mobile power supplies and stage and audio equipment.



CHARACTERISTICS



Flexible Conductor
Class 5/6



Outdoor Installation



Max Service
Temperature: 90°C



Abrasion
Resistance



Flame Non-propagation



Meter by Meter
Marking



Anti-twist Resistant



Max Short-circuit
Temperature:
250°C (Max. 5 s)



Min Bending Radius
5 ~ 6 Cable Diameter



Min Service
Temperature:
-40°C(Fixed)



Heavy Mobile Use



Industrial Use



Chemical & Oil
Resistance




Robotics

INSTALLATION CONDITIONS

CAT-6 CABLE


LAN CABLE | 305M / Roll

Category 6, UTP Cable 4 pair, Blue

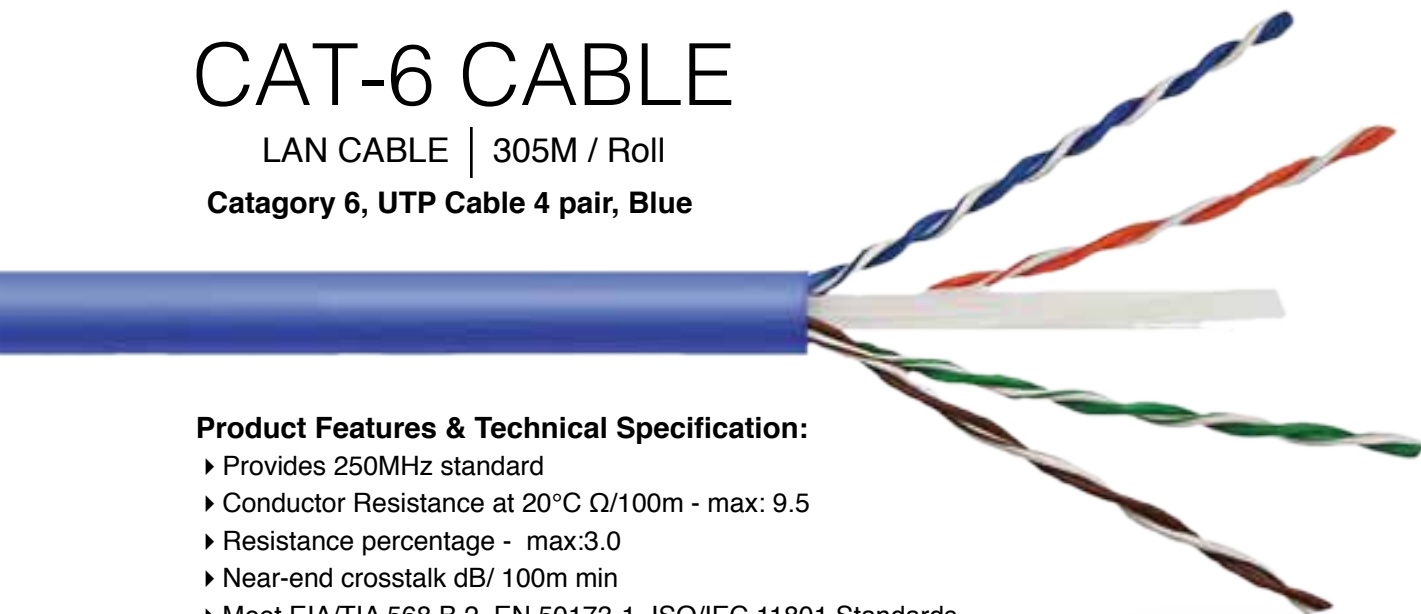

Product Features & Technical Specification:

- Provides 250MHz standard
- Conductor Resistance at 20°C Ω /100m - max: 9.5
- Resistance percentage - max:3.0
- Near-end crosstalk dB/ 100m min
- Meet EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801 Standards.
- PVC jacket with HDPE insulation.
- Solid wire 24(AWG) Bare copper conductor
- Operating temperature: -20°C to +75°C
- Return Loss (Min. at 250MHz): 17.3 dB
- Attenuation: (Min. at 250 MHz) : 30.5 dB

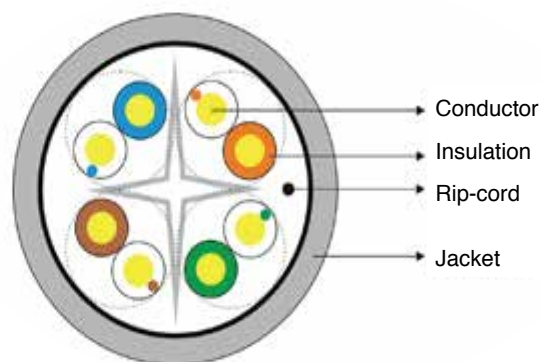

Benefits


- Improved signal strength ► Better speed & performance
- Supports Gigabit ethernet

TRANSMISSION SPECIFICATIONS							
Frequency (MHz)	Attenuation(Max) (dB/100m)	NEXT(Min) (dB/100m)	PSNEXT (Min) (dB/100m)	ELFEXT (Min) (dB/100m)	PS ELFEXT(db)	RL(Min) (dB)	Delay(ns)
1	2	86.1	81.1	82.1	75.3	20	100±15
4	3.5	82.7	77	73.6	65.1	23	100±15
10	5.5	71.9	67.8	63.7	55.3	25	100±15
16	7.6	66.6	63.1	60.6	54.1	25	100±15
20	8.9	66	62.3	58.2	47.8	25	100±15
31.25	10.1	64.9	59.1	54	46	23.6	100±15
62.5	14.5	60.3	55.2	44	41.2	21.5	100±15
100	18.7	59.5	51.9	42.5	37.5	20.1	100±15
200	27.2	57.2	45.6	35.6	30.7	18	100±15
250	30.5	55.2	43.6	30.3	22.2	17.3	100±15

BW BRASS CABLE GLANDS

- To BS 6121: Part 1.
- Suitable for single wire armoured, plastic or rubber sheathed cables.
- Application - for use in dry, indoor situations.
- Low cost two part design.
- Shroud may be used for additional ingress protection.

- IP 54.
- Finish : Natural Brass and also available in Electro Tinned and Nickel.
- Threads: Entry threads are metric to BS 3643 and are also available in Imperial (ET).
- Also available in Aluminium (BS 1474) cable glands.

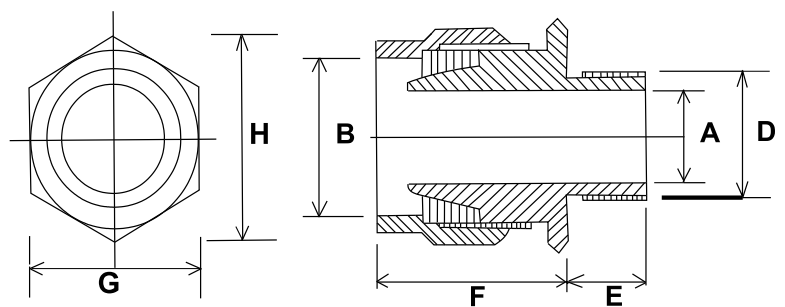

STANDARD : B.S. 6121, Part-1 : 1989

APPLICATION : Indoor, for use with all type of SWA Cables

FUNCTION : Provides for Armour Clamp Only


MECHANICAL : Provides retention of Armour or Brand Impact Resistant

GLAND SIZE	ENTRY THREAD		CABLE ACCEPTANCE DETAIL			ACROSS FLAT	ACROSS CORNER
	DIA. C	LENGTH MINIMUM E	DIA. MAX. A	DIA. MAX. B	ARMOUR DIA. D		
20 S	20	10	12.00	16.00	0.9/1.25	21.00	23.40
20 L	20	10	15.00	20.00	0.9/1.25	24.00	26.80
25 L	25	10	20.00	26.00	1.25/1.60	31.70	35.00
32 L	32	10	26.30	32.50	1.60/2.00	39.80	45.00
40 L	40	12	32.30	40.00	1.60/2.00	49.50	56.00
50 L	50	13	44.00	53.20	2.00/2.50	60.50	68.50
63 L	63	13	55.00	66.00	2.50	76.00	85.80
75 L	75	16	67.00	78.00	2.50	89.50	100.00
90 L	90	18	79.00	90.00	2.50/3.15	104.30	117.00

CW BRASS CABLE GLANDS

CW BRASS GLANDS FOR SWA CABLE

- To BS 6121: Part 1.
- Suitable for single wire armoured, plastic or rubber sheathed cables.
- Outer seal grips sheath of cable.
- For use in most climatic conditions weatherproof and waterproof.
- Seal rated to I P 66.
- Design has separate armour locking ring.
- Gland rated to IP 66 with use of suitable sealing washer or thread sealant at gland interface.
- Finish : Natural Brass and also available in Electro Tinned and Nickel.

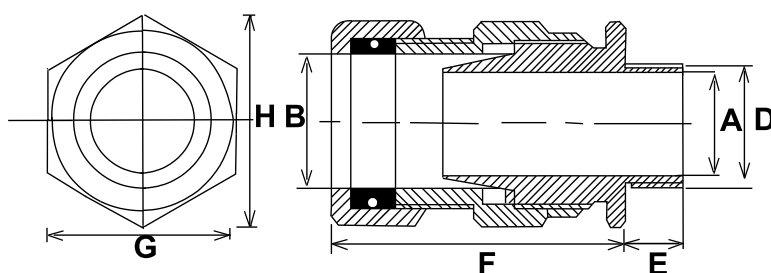

CW FLAME PROOF GLAND FOR SWA CABLE

As above but with these additional benefits :


- For use in hazardous environments
- Complies with BS 5501 Pt1 & Pt 6
- CW for flame proof increased safety application
- Threads: Entry threads are metric to BS 3643 and are also available in Imperial(ET)
- Also available in Aluminium (BS 1474) cable glands

GLAND SIZE	ENTRY THREAD		CABLE ACCEPTANCE DETAIL			ACROSS FLAT	ACROSS CORNER
	DIA. C	LENGTH MINIMUM E	DIA. MAX. A	DIA. MAX. B	ARMOUR DIA. D		
20 S	20	9	11.60	16.00	0.9/1.25	21.50	24.50
20 L	20	9	14.00	20.00	0.9/1.25	24.20	27.30
25 S	25	9	19.00	24.00	1.25/1.60	30.00	33.60
25 L	25	10	20.00	27.00	1.25/1.60	30.00	34.40
32 S	32	10	24.00	30.50	1.60/2.00	36.50	40.00
32 L	32	10	26.20	33.00	1.60/2.00	36.50	42.30
40 S	40	11	30.00	37.00	1.60/2.00	44.50	50.00
40 L	40	11	32.50	41.00	1.60/2.00	46.50	52.00
50 S	50	13	40.00	47.50	2.00/2.50	55.00	62.00
50 L	50	13	44.00	52.60	2.00/2.50	59.00	66.00
63 S	63	14	51.00	60.00	2.50	69.00	76.00
63 L	63	14	55.00	66.00	2.50	73.00	82.00
75 S	75	15	62.00	72.00	2.50	83.00	94.00
75 L	75	15	67.00	78.00	2.50	86.30	98.00
90 L	90	19	79.00	90.00	2.50/3.15	105.00	118.00

E1W BRASS CABLE GLAND & A1 A2 GLAND

E1W GLAND FOR SWA CABLE

- Suitable for single wire armoured, plastic or rubber sheathed, extruded bedded cables
- Outer seal grips sheath of cable
- Inner seal grips bedding layer of cable
- For use in most climatic conditions weatherproof and waterproof
- Inner and outer seal rated to IP 66
- Design has separate armour locking ring
- Gland rated to IP66 with use of suitable washer or thread sealant at gland interface
- Finish : Natural Brass and also available in Electro Tinned and Nickel

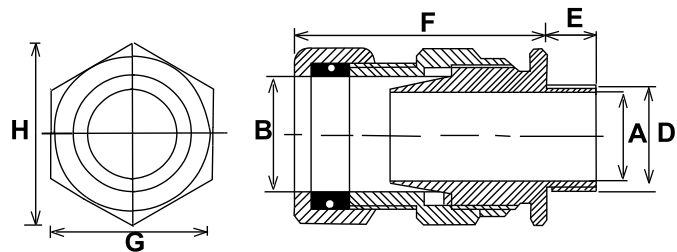

E1W FLAME PROOF GLAND FOR SWA CABLE

- For use in hazardous environments
- Complies with BS5501 Pt1 & Pt 6
- E 1 W increased safety application
- Threads: Entry threads are metric to BS3643 and are also available in Imperial (ET)
- Also available in Aluminium (BS 1474) cable glands

A1 A2 CABLE GLANDS



CABLE GLAND KIT CONTAINS :

Gland
Lock Nut
Shroud
Earth Tag


Kit contains two sets of above items up to 32mm sizes & one set from 40mm and above sizes

A1 A2 Type brass indoor cable gland is used with all types of unarmoured cable, providing mechanical cable retention. sealing is provided on the cable outer sheath.

A1 A2 range of industrial cable gland is designed and tested as per BS 6121:Part 1:1989. It meets the requirements of EN 50262 : 1999.

TECHNICAL INFORMATION

Type	: A2
Design Specification	: BS 6121: Part 1: 1989.
Ingress Protection Rating	: IP66
Standard Gland Material	: Brass
Optional Gland Material	: Nickel Plated Brass
Cable Type	: Unarmoured
Sealing Area(s)	: Cable Outer Sheath
Available Accessories	: Steel/Brass Locknut, PVC/LSF Shroud Brass Earth Tag, Nylon Washer, Brass Reducer

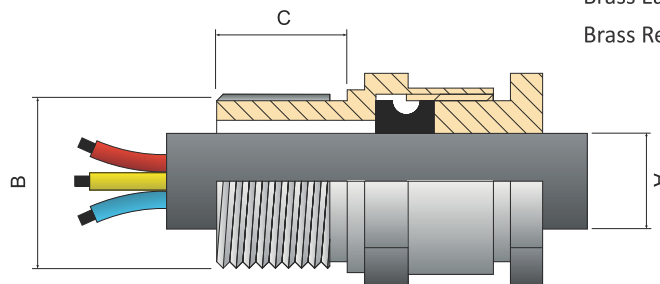

HEAVY DUTY CABLE LUGS

TUBULAR CABLE LUGS


FOR COPPER CONDUCTORS

Heavy Duty

Material : E-Copper-BS 1977

Surface : Tin Plated

(With or Without inspection hole)

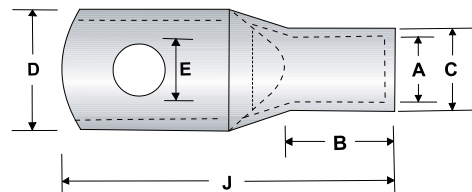

Cable mm2	STUD Ø E	ID A	OD C	Palm Width D	Barrel Length B	LEN J	CODE
1.5	4.2	1.8	3.7	8.0	5	16	KB 1.5-4
	5.2	1.8	3.7	8.0	5	16	KB 1.5-5
	6.5	1.8	3.7	10.0	5	18	KB 1.5-6
2.5	4.2	2.4	4.0	8.0	7	18	KB 2.5-4
	5.2	2.4	4.0	10.0	7	20	KB 2.5-5
	6.5	2.4	4.0	10.0	7	20	KB 2.5-6
	8.4	2.4	4.0	9.0	7	24	KB 2.5-8
4	4.2	3.1	4.8	10.0	7	20.0	KB 4.-4
	5.2	3.1	4.8	10.0	7	20.0	KB 4.-5
	6.5	3.1	4.8	10.0	7	20.0	KB 4.-6
	8.2	3.1	4.8	12.0	7	24.0	KB 4.-8
6	5.2	3.8	5.5	10.0	9	23.0	KB 6-5
	6.5	3.8	5.5	10.0	9	23.0	KB 6-6
	8.4	3.8	5.5	12.0	9	27.0	KB 6-8
	10.5	3.8	5.5	15.0	9	32.0	KB 6-10
10	6.5	4.5	6.2	12.0	9	25.0	KB 10-6
	8.4	4.5	6.2	12.0	9	27.0	KB 10-8
	10.5	4.5	6.2	15.0	9	32.0	KB 10-10
16	6.5	5.4	7.1	12.0	12	30.0	KB 16-6
	8.4	5.4	7.1	12.0	12	30.0	KB 16-8
	10.5	5.4	7.1	15.0	12	36.0	KB 16-10
	13.0	5.4	7.1	18.0	12	38.0	KB 16-12
25	6.5	6.8	8.8	13.0	12	30.0	KB 25-6
	8.4	6.8	8.8	16.0	12	30.0	KB 25-8
	10.5	6.8	8.8	18.0	12	37.0	KB 25-10
	13.0	6.8	8.8	18.0	12	37.0	KB 25-12
35	6.5	8.2	10.6	15.3	12	35.0	KB 35-6
	8.4	8.2	10.6	15.3	12	35.0	KB 35-8
	10.5	8.2	10.6	18.0	12	38.0	KB 35-10
	13.0	8.2	10.6	20.0	15	43.0	KB 35-12
	17.0	8.2	10.6	20.0	15	43.0	KB 35-16
50	8.4	9.2	11.2	15.5	16	43.0	KB 50-8
	10.5	9.2	11.2	15.5	16	43.0	KB 50-10
	13.0	9.2	11.2	15.5	16	43.0	KB 50-12
	17.0	9.2	11.2	15.5	16	47.0	KB 50-16
70	8.4	11.5	14.0	20.5	18	50.0	KB 70-8
	10.5	11.5	14.0	20.5	18	50.0	KB 70-10
	13.0	11.5	14.0	20.5	18	50.0	KB 70-12
	14.7	11.5	14.0	20.5	18	57.0	KB 70-14
95	10.5	12.9	15.6	23.0	20	55.0	KB 95-10
	13.0	12.9	15.6	23.0	20	55.0	KB 95-12
	14.7	12.9	15.6	23.0	20	55.0	KB 95-14

Cable mm2	STUD Ø E	ID A	OD C	Palm Width D	Barrel Length B	LEN J	CODE
120	10.5	14.6	18.0	26.0	22	60.0	KB 120-10
	13.0	14.6	18.0	26.0	22	60.0	KB 120-12
	14.7	14.6	18.0	26.0	22	64.0	KB 120-14
	17.0	14.6	18.0	26.0	22	64.0	KB 120-16
150	10.5	16.0	19.5	28.0	26	69.0	KB 150-10
	13.0	16.0	19.5	28.0	26	69.0	KB 150-12
	14.7	16.0	19.5	28.0	26	69.0	KB 150-14
	17.0	16.0	19.5	28.0	26	69.0	KB 150-16
	21.0	16.0	19.5	28.0	26	79.0	KB 150-20
185	10.5	18.7	22.4	33.0	44	78.0	KB 185-10
	13.0	18.7	22.4	33.0	44	78.0	KB 185-12
	14.7	18.7	22.4	33.0	44	78.0	KB 185-14
	17.0	18.7	22.4	33.0	44	78.0	KB 185-16
	21.0	18.7	22.4	33.0	44	78.0	KB 185-20
240	10.5	21.9	25.9	38.0	38	92.0	KB 240-10
	13.0	21.9	25.9	38.0	38	92.0	KB 240-12
	14.7	21.9	25.9	38.0	38	92.0	KB 240-14
	17.0	21.9	25.9	38.0	38	92.0	KB 240-16
	21.0	21.9	25.9	38.0	38	92.0	KB 240-20
	BL	21.9	25.9	38.0	38	92.0	KB 240-BL
300	13.0	23.4	28.0	41.0	42	101.0	KB 300-12
	14.7	23.4	28.0	41.0	42	101.0	KB 300-14
	17.0	23.4	28.0	41.0	42	101.0	KB 300-16
	21.0	23.4	28.0	41.0	42	101.0	KB 300-20
	BL	23.4	28.0	41.0	42	101.0	KB 300-BL
400	13.0	28.6	34.0	48.0	44	114.0	KB 400-12
	14.7	28.6	34.0	48.0	44	114.0	KB 400-14
	17.0	28.6	34.0	48.0	44	114.0	KB 400-16
	21.0	28.6	34.0	48.0	44	114.0	KB 400-20
	BL	28.6	34.0	48.0	44	114.0	KB 400-BL
500	17.0	31.0	36.0	54.0	48	124.0	KB 500-16
	21.0	31.0	36.0	54.0	48	124.0	KB 500-20
	BL	31.0	36.0	54.0	48	124.0	KB 500-BL
630	13.0	35.0	41.0	62.0	56	144.0	KB 630-12LD
		35	45.0			144	KB 630-BL
		39	50.6			170	KB 800-BL
		43	56.2			200	KB 1000-BL
	17.0	35.0	41.0	62.0	56	144.0	KB 630-16LD
	21.0	35.0	41.0	62.0	56	144.0	KB 630-20LD
630	17.0	35.0	45.0	65.0	56	144.0	KB 630-16 HD
	21.0	35.0	45.0	65.0	56	144.0	KB 630-20 HD
	BL	35.0	45.0	65.0	56	144.0	KB 630-BL HD
800	BL	39.0	50.6	73.5	78	170	KB 800-BL HD
1000	BL	43	56.2	81.0	90	200	KB 1000-BL HD

EARTHROD & ACCESSORIES, BRASS ADAPTOR, CABLE PULLER / BENDING SPRING




BONDED COPPER EARTH RODS

KED BROOKE Bonded Copper Earth Rods are made from high tensile strength steel (Copper Plated).

SOLID COPPER EARTH ROD & ACCESSORIES

KED BROOKE Solid Copper Earth Rods are made from pure EC Copper (Natural Finish).

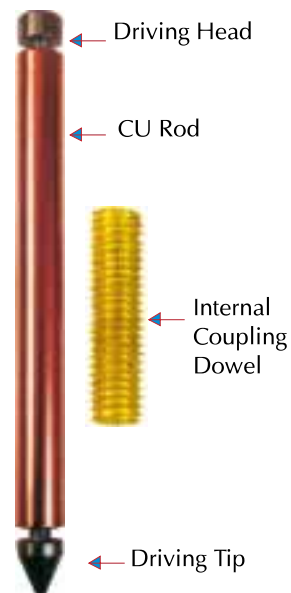

Earth rod Coupler & Clamp
16 & 20mm



Adaptor - Brass / Nickel plated
20 & 25mm

CABLE PULLER & BENDING SPRING

CABLE PULLER



IRON CABLE PULLER WITH 2 RING PULLS & 2.5 MM THICKNESS

KCP10	Length 10meter
KCP20	Length 20meter
KCP30	Length 30meter

BENDING SPRING



BENDING SPRING FOR PVC CONDUIT

KPBS20	Length 500mm	20mm Dia.
KPBS25	Length 500mm	25mm Dia.
KPBS32	Length 500mm	32mm Dia.

WIRING ACCESSORIES

BS SWITCHES & SOCKETS

WEATHER PROOF SWITCHES

WEATHERPROOF ISOLATOR

INDUSTRIAL PLUG & SOCKET

TERMINAL BLOCKS

CABLE REELS

UNIVERSAL MULTI PIN ADAPTOR

EXTENSION SOCKETS

PLUG TOP

PG GLANDS

CEILING ROSE

PVC TRUNKING



SWITCHES & SOCKETS

WHITE PVC SWITCHES & SOCKETS - KBV

The comprehensive range includes all ranges such as: White PVC Switches and Sockets.



13A Double switch socket



45A DP Switch with neon



250W Fan controller

METAL CLAD SWITCHES & SOCKETS - KBMC

Metal clad switches and sockets are perfect for factories, workshops, garages and sheds where they are needed to be that bit tougher than ordinary ones. As they are made from steel, they are tough and impact resistant.



13A Double switch socket



20A DP Switch with neon



3 Gang 2way switch

WEATHERPROOF SWITCHES & SOCKETS - KBCL

Weatherproof switches and sockets are a great addition to outdoor space as they allow power outside whilst being protected against the elements.



13A WP double switch socket



2 Gang 2way WP switch



3 Gang 2way WP switch

ISOLATOR, PLUG & SOCKETS, TERMINAL BLOCKS

WEATHERPROOF ISOLATOR

Fixed Neutral & Earth bars included
Dual 25 mm screwed entries top & bottom
25 mm to 20 mm screwed reducers included
2x25mm rear knockouts
Padlockable for security
Large terminals accommodate 25mm²



35A 2p WP Isolator IP65

INDUSTRIAL PLUG & SOCKETS

Kedbrooke Industrial Plug & Socket series are in compliance with International Standards

Current : 16Amp/32Amp
Voltage : 110V/220V/380V
Protection Degree: IP44
Ranges: Mobile Plug, Mobile Socket,
Wall Mount Socket, Panel Mount



16A 3way multi socket



110V 32A 3pin socket



16A 3pin wall socket

TERMINAL BLOCKS

Nickel plated brass terminal
Captive screws of zinc-plated steel
Engineering Plastic Casting
Self-extinguishing material in compliance
with IEC 60695-02 Standard 850C

Sizes:

6 Sq.mm
10 Sq.mm
16 Sq.mm
25 Sq.mm



20A 10mm strip connector

CABLE REELS

**ESMA
Approved**

CABLE REEL - OPEN DRUM

KB2200-4-25 MTRS, KB2250-4-40 MTRS, KB2250-4-50 MTRS

- 250V open drum extension reels fitted with a 13Amp 3 pin plug and 4 outlet sockets.
- 1.5mm diameter 3 core heavy duty cable.
- Strong and durable for industrial use.
- Ideal for use with power tools, transformers etc.
- Unbreakable plastic body.
- Available in 25 Mtr, 40Mtr & 50 Mtr.



CASSETTE REEL



KB-S2208-4-5 MTRS, KB-S2206-4-10 Mtr

- Portable power cassette reel provides power where you need it most
- Each unit has 4x13Amp socket outlets, 250V, PVC coated 1.25 sqmm insulated cable 3 core
- Available in 10Mtr & 5Mtr

HANDBAG REEL

KB2225-4-25MTR

- 25Mtr 13Amp extension reel handbag style.
- Robust, easy wind action with integral hand grip and four socket outlets.
- Unbreakable plastic case with easy wind handle fitted with approved plugs.



MULTI PIN ADAPTOR, EXTENSION SOCKET & PLUG TOP

UNIVERSAL MULTI PIN ADAPTOR

Multipurpose use, can connect many plugs at one time
Non flammable
Vertical and horizontal design and the sockets are universal design so any country pin can go inside.

UNIVERSAL TRAVEL ADAPTOR with USB PORT:
Universal Travel adaptor with USB PORT (AU/UK/US/EU)
Surge protection
Safety shutter
Made in Malaysia



UNIVERSAL EXTENSION SOCKET

Portable Extension socket outlets with individual neon switch
13Amp 240V with different cable lengths - 2Mtr/3Mtr/5Mtr
Fire retardant body of PC material
Available in 2G, 3G, 4G, 5G & 6G



PLUG TOPS

High impact poly carbonate (PC) body
Fire retardant (FR) body
Fitted with UK certified fuse, Approved by ASTA (BS1362)
Product safety comply to BS 1362, SS145 & MS 589
Available in 13A, 15A, 250V
Made in Malaysia



PG GLAND, CEILING ROSE & PVC TRUNKING

PG GLANDS

Kedbrooke PG Glands can be used to fix cables and provide effective protection against dust and water from entering electrical distribution board, electro-mechanical controlling board and other instruments.



CEILING ROSE

Kedbrooke Ceiling Rose provides electrical connection in one click action makes it very easy and convenient for lighting installations. All contacts are mounting & overall dimensions inaccessible and earth contact comes at first while clicking ensures safety standards.

Model: KBV6701


Rating : 6A



PVC TRUNKING

PVC trunking are used in Cable Management Systems to hide or protect the cable across the room, a floor or the wall.

Available in Sticker type & Normal (Non adhesive)

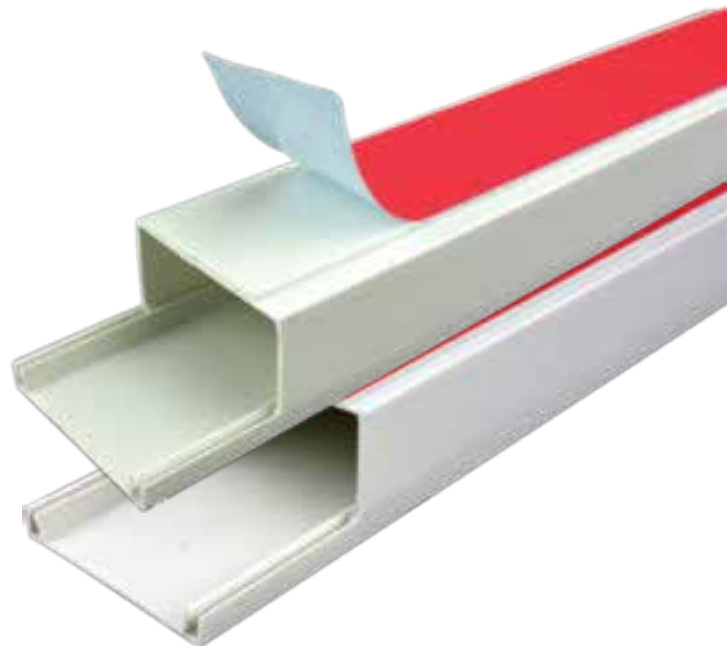

ENCLOSURES & JUNCTION BOXES

METAL ENCLOSURES

PLASTIC JUNCTION BOX

ALUMINIUM JUNCTION BOX



ENCLOSURES AND JUNCTION BOXES

METAL ENCLOSURES

These enclosures are widely used in assemble of control box, terminal boxes, power distribution and instrument container with stainless steel latch, hinges and special locking device. Components include Door, Mounting Plate, Lock system, Gland Plate, Sealing gasket and fixing accessories.

Made of high quality sheet steel of thickness 1.2mm.

Epoxy polyester powder coating in RAL 7032.

Standard mounting plate of zinc coated steel of thickness 1.5mm.

Degree of protection upto IP66.



PLASTIC JUNCTION BOX

Kedbrooke Plastic Junction Box excellent processing and stability should be guaranteed by material such as high Intensity ABS, AC,PC polyester assured flammability material and glass 30% annexing material. Convenient for use insulation of the installation of terminal box.

High Intensity ABS, PC polyester assured flammability material.

Convenient for use insulation of the installation of terminal box.

Cover with stainless steel screws, RAL 7035 grey.

Temperature range: -40°C to 120°C.

Degree of protection upto IP56.



ALUMINIUM JUNCTION BOX

LV Aluminium boxes are suitable for installation, circuit breaking, connection and control of electric and electronic equipments, and find their main application in industrial, automotive, railways, navy, tunnels, parkings, industrial buildings fields ensuring a high mechanical and vibration resistance with IP66 protection degree.

It is a range of die cast aluminium junction boxes.

The cover is equipped with stainless steel captive screws.

Temperature Range: -50 to 130, Epoxy polyester powder coating in RAL7038.

Degree of protection upto IP66.



WATER HEATER

GALVANIZED IRON WATER HEATER & GLASS LINED WATER HEATER



WATER HEATER

GALVANIZED IRON WATER HEATER

Made in Sultanate of Oman



Single Weld Galvanized Iron Inner Tank
High Quality Heating Element
High Quality Automatic Thermostat
Pressure Relief Valve For Extra Safety
CFC Free Insulation Foam Saves Electricity
Epoxy Polyester Powder Coated outer body

Rated Voltage	220 (V) - 240 (V)
Rated Input Power	1200 (W) / 1500 (W)
Power Frequency	50 HZ / 1PH
Set temperature maximum	75°C
Rated pressure	7 bar (MPa 0.7)
Inlet/Outlet pipe size	1/2" BSPT
Foam Insulation	20mm
Carton Thickness	5 Ply

Model No	Water Capacity	Diameter	Height	Carton Size (mm)	Gross Weight (Kgs)
KBGI 010V	10 Liters	290	340	340X 340 X 375	7.000
KBGI15V	15 Liters	290	440	340 X 340 X 465	8.500
KBGI30V	30 Liters	400	465	425 X 425X550	12.300
KBGI30H	30 Liters	400	465	425 X 425X550	12.500
KBGI50V	50 Liters	400	635	425 X 425 X 675	14.500
KBGI50H	50 Liters	400	635	425 X 425 X 675	14.700
KBGI80V	80 Liters	450	770	475 X 475 X 820	22.300
KBGI80H	80 Liters	450	770	475 X 475 X 820	22.700



GLASS LINED ELECTRIC WATER HEATER

Made in Sultanate of Oman


High quality Glass lined (Enameled) steel inner tank
Flange type Italian make heating element
Double safety Italian automatic thermostat
Pressure relief valve for extra safety
Magnesium anode for protection of inner boiler
Stainless steel inlet /outlet pipe
CFC free insulation foam saves electricity
Epoxy polyester powder coated outer body

Rated Voltage	220 (V) - 240 (V)
Rated Input Power	1200 (W) / 1500 (W)
Power Frequency	50 HZ / 1PH
Set temperature maximum	75°C
Rated pressure	7 bar (MPa 0.7)
Inlet/Outlet pipe size	1/2" BSPT
Foam Insulation	20mm
Carton Thickness	5 Ply

Model No	Water Capacity	Diameter	Height	Carton Size (mm)	Gross Weight (Kgs)
KBGL10V	10 Liters	290	340	340X 340 X 375	7.600
KBGL15V	15 Liters	290	440	340 X 340 X 465	8.500
KBGL30V	30 Liters	400	465	425 X 425X550	15.200
KBGL30H	30 Liters	400	465	425 X 425X550	15.300
KBGL50V	50 Liters	400	635	425 X 425 X 675	17.680
KBGL50H	50 Liters	400	635	425 X 425 X 675	18.000
KBGL80V	80 Liters	450	770	475 X 475 X 820	24.280
KBGL80H	80 Liters	450	770	475 X 475 X 820	24.500



PRODUCT RANGE




FANS

Industrial Pedestal Fans • Industrial Orbit Fans • Industrial Wall Fans • Portable Blower Fans • Industrial Exhaust Fans • Ceiling Duct Exhaust Fans • Mist Fans • Ceiling Fan • Window Mounted Exhaust Fans • Electric Shutter Fans



LAMPS & LIGHTING

LED Flood Light • LED Panel Light • LED Recessed & Surface Panel Lights • LED Bulbs E27- A60/T Lamp • LED Mirror Light • LED Glass Tube • LED Filament/ Candle Lamp • LED Stand Light • LED Prismatic Light Fixture • LED Ceiling Light • LED MR16 - GU5.3/GU10 Lamps • Weather Proof Fittings - LED • LED Downlight • Insect Killer




G.I. CONDUIT & ACCESSORIES

G.I Conduit - Class 4 • G.I Conduit - Class 3 • Gi Boxes • Bending Springs • Saddles • G.I Flexible Conduits - PVC Coated




CABLE & CABLE ACCESSORIES

Rubber Cable • Cat 6 Cable • Flexible Cable • Control Cable • Earth Rod • Cable Puller • Terminals • Brass Glands



WIRING ACCESSORIES

Switches & Sockets (Pvc) • Metal Clad Switches • Switch & Sockets (Ecp) • Weather Proof Switches • Cable Reel - Open Drum • Cable Reels - Cassette Reel • Cable Reels -Dhuko/ Danish • Cable Reel - Hand Bag Reel • Industrial Plug & Socket • Universal Multi Pin Adaptor • Universal Extension Socket • Plug Top • Weatherproof Isolator • PVC Trunking • PG Glands



ENCLOSURES & PVC BOXES

Metal Enclosure • Accessories for Wall Mount Enclosure • Aluminum Enclosure • Stainless Steel Enclosure • Plastic Junction Box



WATER HEATER

Glass Lined Water Heater • Galvanized Iron Water Heater



ISO 9001:2015 CERTIFIED



KEDBROOKE INDUSTRIES LIMITED (REG. No. 5379278)
Little Acre, Ascot Road, Touchen End,
Berkshire, SL6 3LD, United Kingdom



+971 4 2288 600 (U.A.E), +44 7538989400 (UK)



info@kedbrooke.com
www.kedbrooke.com